
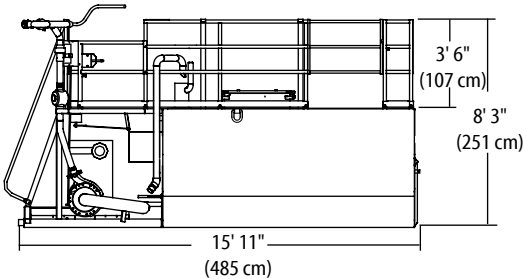


T170 HYDROSEEDER®

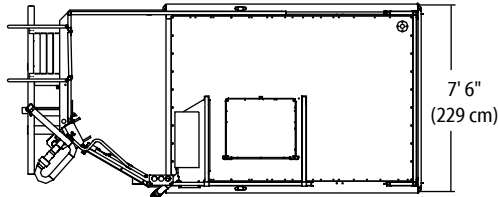

FINN MODEL T170 TECHNICAL SPECIFICATIONS

POWER	Kubota V3300 Diesel Tier II, 71 hp (53kw) , with over-center clutch. Vibration isolated. Gauge cluster includes: hour meter, volt meter, engine temperature, engine oil pressure, and engine tachometer Controls include: clutch, agitator direction and speed, discharge boom and recirculation control valves, engine throttle, safety horn, and engine kill
ENGINE SAFETY SYSTEM	Low oil pressure, high water temperature shutoff
TANK SIZE	1,750 gallon (6,625 liter) liquid capacity, 1,500 gallon (5,678 liter) working capacity
FUEL TANK CAPACITY	38 gallon (145 liter)
PUMP	Centrifugal 4" x 2" (10.2 cm x 5 cm), 320 GPM @ 115 psi (1,210 lpm @ 792 kPa), 1" (2.54 cm) solid clearance
PUMP DRIVE	In-line single clutch/pump shaft design with over-center clutch. Pump drive is independent of agitator drive.
AGITATION	Mechanical paddle agitation and liquid recirculation.
AGITATOR DRIVE	Reversible, variable speed hydraulic motor drive (0-130 rpm)
DISCHARGE DISTANCE	Up to 200 ft. (61 m) from discharge tower
MATERIAL CAPACITY	5,000 lbs. (2,268 kg) granular solids, 750 lbs. (340 kg) fiber mulch
NOZZLES	(2) narrow fan, (2) wide fan, (2) long distance
EMPTY WEIGHT	6,500 lbs. (2,950 kg)
WORKING WEIGHT *	23,900 lbs. (10,840 kg)

*Working weights are approximate and do not include options or stored materials.

FINN Corporation has a policy of continuous product improvement, and reserves the right to change design and specifications without notice.

HydroSeeder® is a registered trademark of the FINN Corporation.