
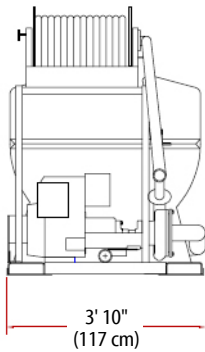


T30 HYDROSEEDER®

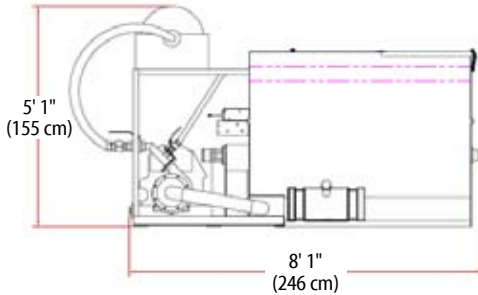

### FINN MODEL T30 TECHNICAL SPECIFICATIONS

POWER .....	Kohler Command 15 hp (11.2 kw), electric start, air cooled gas, oil guard protection
TANK SIZE .....	335 gallon (1,268 liter) liquid capacity, 281 gallon (1,063 liter) working capacity
FUEL TANK CAPACITY .....	6.6 gallon (25 liter)
PUMP .....	Centrifugal 3" x 1 1/2" (7.5 cm x 3.75 cm), 65 GPM @ 60 psi (227 lpm @ 414 kPa), 3/4" (1.9 cm) solid clearance
PUMP DRIVE .....	Direct drive through electric clutch, pump drive is independent of agitator operation
AGITATION .....	Mechanical paddle agitation and liquid recirculation
AGITATOR DRIVE .....	Reversible, variable speed hydraulic motor (0-130 rpm), with control lever at front and rear of unit
DISCHARGE DISTANCE .....	Up to 70 ft. (23 m) from end of hose
MATERIAL CAPACITY .....	500 lbs. (227 kg) granular solids, 100 lbs. (45 kg) fiber mulch
NOZZLES .....	(1) narrow fan, (1) wide fan, (1) long distance
HOSE REEL .....	Standard electric hose reel with a 12V electric motor, 100' x 1 1/4" semi-rigid polybraid hose and hose holder
EMPTY WEIGHT .....	1,480 lbs. (671 kg)
WORKING WEIGHT* .....	4,560 lbs. (2,068 kg)

\*Working weights are approximate and do not include stored materials.

FINN Corporation has a policy of continuous product improvement, and reserves the right to change design and specifications without notice.

HydroSeeder® is a registered trademark of the FINN Corporation.