



T30 HydroSeeder

The FINN T30 HydroSeeder has been modified and redesigned to provide the ideal entry-level machine loaded with features that come standard with every unit. The T30 is the perfect FINN HydroSeeder for tackling smaller hydroseeding projects or an affordable way of adding to an existing fleet.

FINN developed HydroSeeder technology in 1953 and we've been the industry leader in quality and innovation ever since. With the FINN T30, you don't have to settle for less than proven and reliable FINN quality for a wide array of the most common hydroseeding applications.

Versatile & Economical. The T30 is FINN's most economical HydroSeeder ever. You can easily manage professional quality seeding, fiber mulching, straw tacking, and much more – all with legendary FINN efficiency and cost effectiveness.

Feature-Packed Machine. The FINN T30 HydroSeeder features a durable, 335 gallon liquid capacity steel tank; a

hydraulically-driven and reversible mechanical agitator for fast and thorough mixing; simple controls for economical one-man operation; a FINN-designed centrifugal pump that handles the thickest of slurries with ease; and, fork lift channels and lift ring for easy handling.

All T30 machines come standard with a powerful electric hose reel equipped with 100 feet of hose and a convenient hose holder.



All Around Performance. The T30 goes everywhere you need it to go: residences, cemeteries, golf courses, sports fields, office and apartment complexes, parks, and more.

As the world leader for over 70 years in the design and manufacture of innovative, quality equipment for the green industry, FINN Corporation is committed to your complete satisfaction.

SMARTER WAYS TO WORK

9281 LeSaint Drive • Fairfield, OH 45014-5457 • Phone (513) 874-2818 • Fax (513) 874-2914
Toll Free (800) 543-7166 • Parts (800) 229-8707 • E-mail: sales@finncorp.com
Customer Service/Warranty (888) 382-1966

T30 HYDROSEEDER®

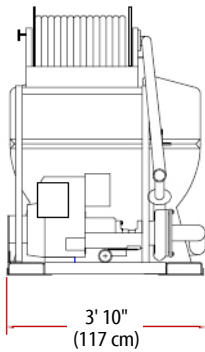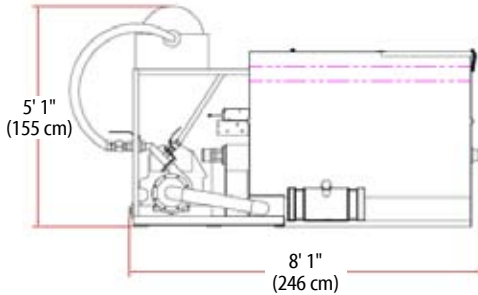

FINN MODEL T30 TECHNICAL SPECIFICATIONS

| | |
|--------------------------|--|
| POWER | Kohler Command 15 hp (11.2 kw), electric start, air cooled gas, oil guard protection |
| TANK SIZE | 335 gallon (1,268 liter) liquid capacity, 281 gallon (1,063 liter) working capacity |
| FUEL TANK CAPACITY | 6.6 gallon (25 liter) |
| PUMP | Centrifugal 3" x 1 1/2" (7.5 cm x 3.75 cm), 65 GPM @ 60 psi (227 lpm @ 414 kPa), 3/4" (1.9 cm) solid clearance |
| PUMP DRIVE | Direct drive through electric clutch, pump drive is independent of agitator operation |
| AGITATION | Mechanical paddle agitation and liquid recirculation |
| AGITATOR DRIVE | Reversible, variable speed hydraulic motor (0-130 rpm), with control lever at front and rear of unit |
| DISCHARGE DISTANCE | Up to 70 ft. (23 m) from end of hose |
| MATERIAL CAPACITY | 500 lbs. (227 kg) granular solids, 100 lbs. (45 kg) fiber mulch |
| NOZZLES | (1) narrow fan, (1) wide fan, (1) long distance |
| HOSE REEL | Standard electric hose reel with a 12V electric motor, 100' x 1 1/4" semi-rigid polybraid hose and hose holder |
| EMPTY WEIGHT | 1,480 lbs. (671 kg) |
| WORKING WEIGHT* | 4,560 lbs. (2,068 kg) |

*Working weights are approximate and do not include stored materials.

FINN Corporation has a policy of continuous product improvement, and reserves the right to change design and specifications without notice.

HydroSeeder® is a registered trademark of the FINN Corporation.